



ADVANCED FLUID  
MANAGEMENT SOLUTIONS

**RAASM S.p.a.**

Via Marangoni 33, 36022  
S. Zeno di Cassola (VI) Italy  
Tel. +39 0424 570891  
info@raasm.com

## P/N 2210F23F

Cable reel s. 280, without transformer. Number of conductors 2, cable type 2 x 1 - H05 RN-F, cable length 14 + 1 (m). Equipped with both fluorescent lights 11W and supply voltage 230 V AC 50 Hz. Rewinding clutch as standard.

### AREAS OF USE


Aeronautics, Agriculture, Automotive, Cleaning, Building and road construction, Chemical industry, Manufacturing industry, Mining industry, Lube trucks and transports, Shipping and offshore, Railway transport

### FEATURES

Information	without transformer
Protection degree of electrical part	IP44
Environment temperature	-5 ÷ +40 °C
Number of conductors	2
Cable type	2x1 - H05 RN-F
Cable length	14 + 1 m
Cable inlet	1,2 m
Inlet voltage	230 V AC - 50 Hz
Lamp power supply voltage	230 V AC - 50 Hz
Lamp connection	E27
Max power	11 W
Lamp protection degree	IP65
Light bulb supplied	p/n 728001
Rewinding clutch	yes
Lamp	p/n F230
Packing	No. 1 - 0,043 m3



### OVERALL DIMENSIONS (mm)

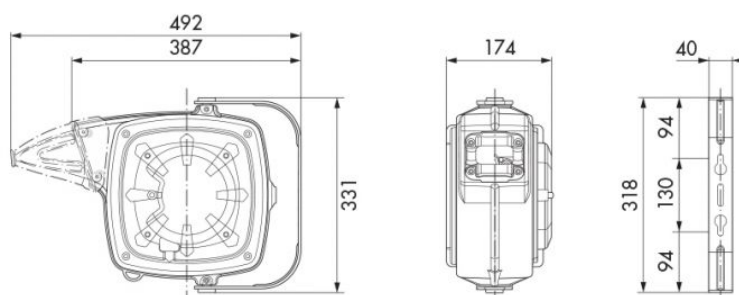

Gross weight

6,8 ÷ 8,8 kg