



ADVANCED FLUID  
MANAGEMENT SOLUTIONS

**RAASM S.p.a.**

Via Marangoni 33, 36022  
S. Zeno di Cassola (VI) Italy  
Tel. +39 0424 570891  
info@raasm.com

## P/N 3C1/3066VSSS

Diaphragm pump in aluminum with cataphoresis treatment series AAB-114 with membranes, balls and seats in Santoprene™

### AREAS OF USE


Aeronautics, Agriculture, Automotive, Building and road construction, Chemical industry, Manufacturing industry, Mining industry, Lube trucks and transports, Shipping and offshore, Railway transport

### FEATURES

Flow rate	200 l/min
Ratio	1:1
Max pressure	8 bar
Max cycles for minute	260 cpm
Delivery for cycles	0,800 l
Max suction lift	dry column 5 m - wet column 7,5 m
Max size pumpable solids	3 mm
Max working temperature	100 °C
Noise level	75 dB
Max air consumption	1,80 m <sup>3</sup> /min
Air working pressure	2 ÷ 6 bar
Air inlet connection	G 3/4" (f)
Air outlet connection (muffler)	G 1" (f)
Fluid inlet connection	G 1.1/4" (f)
Fluid outlet connection	G 1.1/4" (f)
Balls for inlet	ball valve
Membranes	Santoprene™



### OVERALL DIMENSIONS (mm)

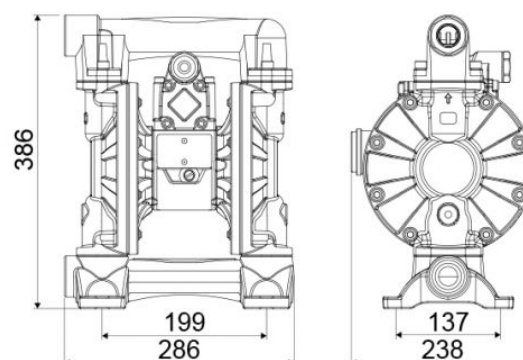

Balls	Santoprene™
Seats	Santoprene™
Packing	No. 1 - 0,03 m <sup>3</sup>
Gross weight	15 kg