



ADVANCED FLUID
MANAGEMENT SOLUTIONS

RAASM S.p.a.

Via Marangoni 33, 36022
S. Zeno di Cassola (VI) Italy
Tel. +39 0424 570891
info@raasm.com

P/N 33500

Diaphragm pump series AB-34 in aluminum with membrane in NBR and suction tube for drums 180÷220 kg

AREAS OF USE


Aeronautics, Agriculture, Automotive, Building and road construction, Chemical industry, Lube trucks and transports, Shipping and offshore, Railway transport

FEATURES

Flow rate	70 l/min
Ratio	1:1
Compatible fluids	water, mineral-vegetable oils, diesel fuel
Pump material	aluminum
Ball valve material	Hytrel®
Air inlet connection	G 3/8" (f)
Fluid inlet-outlet connection	suction tube ø 34 mm - G 3/4" (f)
Air working pressure	2 ÷ 6 bar
Max supply pressure	8 bar
Average air consumption	500 l/min
Noise level	75 dB
Fluid temperature	-10 ÷ +90 °C
Max solids diameter	ø 1,5 mm
Suitable for drums or tanks	suitable for drums 180 ÷ 220 kg
Suction-delivery ball valve with spring	ball valve with spring
Packing	No. 2 - 0,040 m3



OVERALL DIMENSIONS (mm)

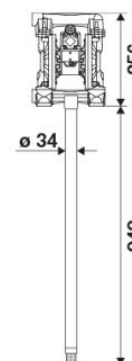

Weight

10 kg