



ADVANCED FLUID
MANAGEMENT SOLUTIONS

RAASM S.p.a.

Via Marangoni 33, 36022
S. Zeno di Cassola (VI) Italy
Tel. +39 0424 570891
info@raasm.com

P/N 33514

Diaphragm pump series APPB-12 in polypropylene and aluminum with suction tube in stainless steel for drums 180÷220 kg

AREAS OF USE


Aeronautics, Agriculture, Automotive, Building and road construction, Chemical industry, Lube trucks and transports, Shipping and offshore, Railway transport

FEATURES

Flow rate	50 l/min
Ratio	1:1
Compatible fluids	antifreeze and windshield washing liquid
Internal flanges and motor engine material	aluminum
Wetted parts	polypropylene
Ball valve material	Teflon®
Air inlet connection	G 3/8" (f)
Fluid inlet-outlet connection	G 3/4" (f) x G 1/2" (f)
Working pressure	2 ÷ 6 bar
Max supply pressure	8 bar
Average air consumption	400 l/min
Noise level	75 dB
Fluid temperature	-10 ÷ +65 °C
Max size pumpable solids	ø 1,5 mm
Suction-delivery ball valve with spring	cylindrical ball valve with spring
Bung adaptor	p/n 33434



OVERALL DIMENSIONS (mm)

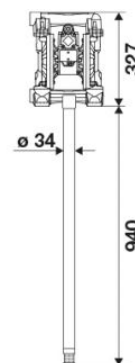

Suction tube	940 mm - ø 34 mm
Packing	2 - 0,034
Weight	12,45 kg