



ADVANCED FLUID
MANAGEMENT SOLUTIONS

RAASM S.p.a.

Via Marangoni 33, 36022
S. Zeno di Cassola (VI) Italy
Tel. +39 0424 570891
info@raasm.com

P/N 33516

Diaphragm pump series APPB-12 in polypropylene and aluminum with suction tube in stainless steel for tanks

AREAS OF USE


Aeronautics, Agriculture, Automotive, Building and road construction, Chemical industry, Lube trucks and transports, Shipping and offshore, Railway transport

FEATURES

Flow rate	50 l/min
Ratio	1:1
Compatible fluids	antifreeze and windshield washing liquid
Internal flanges and motor engine material	aluminum
Wetted parts	polypropylene
Ball valve material	Teflon®
Air inlet connection	G 3/8" (f)
Fluid inlet-outlet connection	G 3/4" (f) x G 1/2" (f)
Working pressure	2 ÷ 6 bar
Max supply pressure	8 bar
Average air consumption	400 l/min
Noise level	75 dB
Fluid temperature	-10 ÷ +65 °C
Max size pumpable solids	ø 1,5 mm
Suction-delivery ball valve with spring	cylindrical ball valve with spring
Bung adaptor	p/n 33434



OVERALL DIMENSIONS (mm)

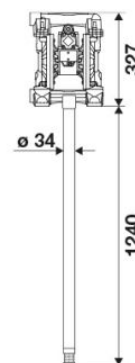

Suction tube	1240 mm - ø 34 mm
Packing	2 - 0,034
Weight	12,48 kg