



ADVANCED FLUID
MANAGEMENT SOLUTIONS

RAASM S.p.a.

Via Marangoni 33, 36022
S. Zeno di Cassola (VI) Italy
Tel. +39 0424 570891
info@raasm.com

P/N 64210

Wall mounted grease kit for 180÷220 kg drums with internal $\varnothing$ 550÷600 mm, pump R 50:1 and hose reel p/n 8440.501

AREAS OF USE


Aeronautics, Agriculture, Building and road construction, Manufacturing industry, Mining industry, Lube trucks and transports, Centralized lubrication, Railway transport

FEATURES

Flow rate	1500 g/min
Ratio	50:1
Compatible fluids	greases, medium/high viscosity
Suction tube upper body	aluminum
Suction tube	carbon steel
Air inlet connection	G 1/4" (f)
Fluid outlet connection	G 3/8" (f)
Air working pressure	6 ÷ 8 bar
Average air consumption	330 l/min
Noise level	81 dB
Air max pressure	8 bar
Suitable for drums	180 ÷ 220 kg
Pump	p/n 62095
Hose reels	p/n 8440.501/2
Gun	p/n 66889
Drum cover	p/n 65600
Follower plate	p/n 66590
Grease connection hose	995.702



OVERALL DIMENSIONS (mm)

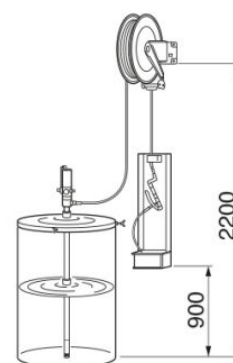

Nipple	p/n 38073
Drip-tray	p/n 88630
Packing	No. 4 - 0,160 m3
Weight	72 kg