



ADVANCED FLUID
MANAGEMENT SOLUTIONS

RAASM S.p.a.

Via Marangoni 33, 36022

S. Zeno di Cassola (VI) Italy

Tel. +39 0424 570891

info@raasm.com

P/N 854024.205

Hose reel with electric motorization 24 V DC in painted steel, s. 540 for hot water, 150 bar, without hose. Inlet-outlet G 1/2" (f)

AREAS OF USE


Manufacturing industry

FEATURES

Pressure	150 bar
Compatible fluids	water max 130 °C
Swivel joint	AISI 304 stainless steel
Seals	Viton®
Characteristic	electric 24 V DC
Material	painted steel
Couplings	-
Hose	-
ø and hose length	-
Inlet	G 1/2" (f)
Outlet	G 1/2" (f)
Reel flow path	AISI 304 stainless steel - zinc plated steel



OVERALL DIMENSIONS (mm)

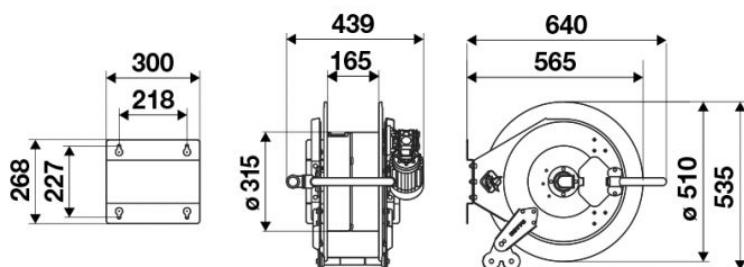

HOSE REELS CAPACITY

ø 1/4"	ø 3/8"	ø 1/2"
90 m	60 m	45 m