



**P/N 9430.200**



Fixed hose reel in ABS and brackets in painted steel s. 430, for hot water, 100 bar, without hose. Inlet-outlet G 1/2" (f)

## AREAS OF USE


Aeronautics, Agriculture, Automotive, Building and road construction, Manufacturing industry, Lube trucks and transports

## FEATURES

Pressure	100 bar
Compatible fluids	water max 130 °C
Swivel joint	AISI 304 stainless steel
Seals	Viton®
Characteristic	fixed
Material	painted steel with ABS drum
Couplings	-
Hose	-
ø and hose length	-
Inlet	G 1/2" (f)
Outlet	G 1/2" (f)
Reel flow path	AISI 304 stainless steel - zinc plated steel



## OVERALL DIMENSIONS (mm)

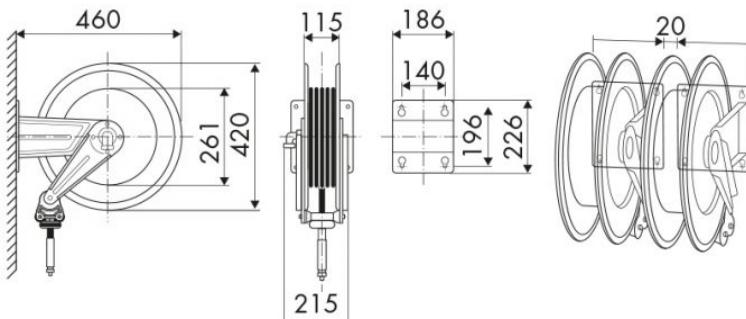

## HOSE REELS CAPACITY

ø 5/16"	ø 3/8"	ø 1/2"
20 m	20 m	16 m