



ADVANCED FLUID
MANAGEMENT SOLUTIONS

RAASM S.p.a.

Via Marangoni 33, 36022

S. Zeno di Cassola (VI) Italy

Tel. +39 0424 570891

info@raasm.com

P/N 9430.600



Fixed hose reel in ABS and brackets in painted steel s. 430, for diesel, 20 bar, without hose (for hose 3/4"). Connection 1/2"

AREAS OF USE


Agriculture, Building and road construction, Manufacturing industry, Mining industry, Lube trucks and transports, Shipping and offshore, Railway transport

FEATURES

Pressure	20 bar
Compatible fluids	diesel fuel
Swivel joint	brass
Seals	Viton®
Characteristic	fixed
Material	painted steel with ABS drum
Couplings	-
Hose	-
ø and hose length	-
Inlet	G 1/2" (f)
Outlet	G 1/2" (m)
Reel flow path	brass - zinc plated steel



OVERALL DIMENSIONS (mm)

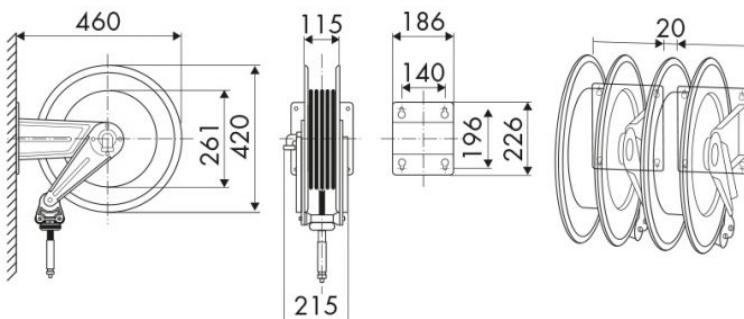

HOSE REELS CAPACITY

ø 1/2"	ø 5/8"	ø 3/4"
16 m	14 m	8 m