



P/N 9432.500



Fixed hose reel in ABS and brackets in AISI 304 stainless steel s. 430, for grease, 600 bar, without hose. Inlet G 3/8 (f) - outlet G 1/2 (f)

AREAS OF USE


Aeronautics, Agriculture, Automotive, Cleaning, Building and road construction, Chemical industry, Manufacturing industry, Lube trucks and transports, Shipping and offshore, Railway transport

FEATURES

Pressure	600 bar
Compatible fluids	grease
Swivel joint	zinc plated steel
Seals	polyurethane
Characteristic	fixed
Material	AISI 304 stainless steel with ABS drum
Couplings	-
Hose	-
Ø and hose length	-
Inlet	G 3/8" (f)
Outlet	G 1/2" (f)
Reel flow path	zinc plated steel - AISI 304 stainless steel



OVERALL DIMENSIONS (mm)

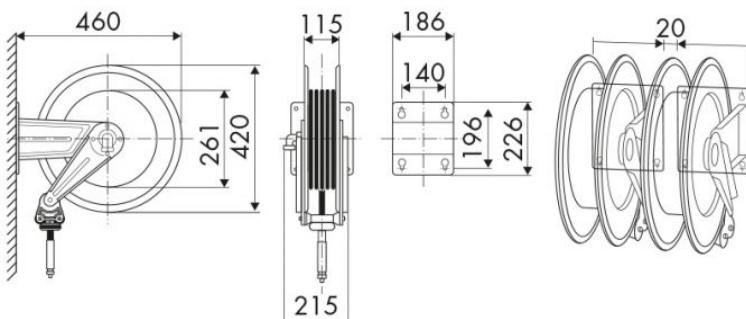

HOSE REELS CAPACITY

Ø 5/16"	Ø 3/8"
12 m	15 m