



ADVANCED FLUID  
MANAGEMENT SOLUTIONS

RAASM S.p.a.

Via Marangoni 33, 36022

S. Zeno di Cassola (VI) Italy

Tel. +39 0424 570891

info@raasm.com

**P/N 9450.500**



Enclosed fixed hose reel in ABS s. 430, for grease, 600 bar, without hose. Inlet G 3/8 (f), outlet G 1/2 (f)

## AREAS OF USE


Aeronautics, Agriculture, Automotive, Building and road construction, Manufacturing industry, Lube trucks and transports

## FEATURES

Pressure	600 bar
Compatible fluids	grease
Swivel joint	zinc plated steel
Seals	polyurethane
Characteristic	fixed
Material	painted steel with ABS drum
Couplings	-
Hose	-
ø and hose length	-
Inlet	G 3/8" (f)
Outlet	G 1/2" (f)
Reel flow path	zinc plated steel



## OVERALL DIMENSIONS (mm)

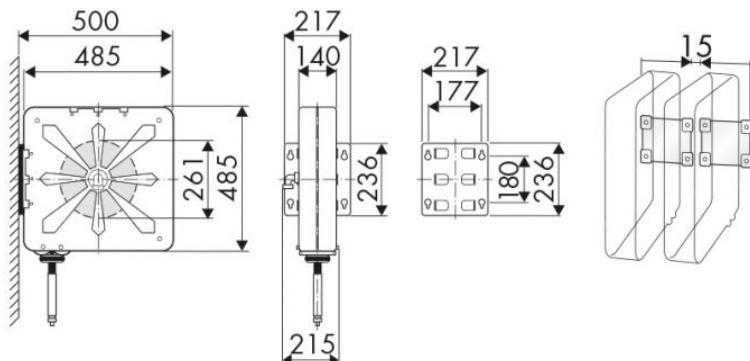

## HOSE REELS CAPACITY

ø 5/16"	ø 3/8"	ø 1/2"
20 m	20 m	16 m