



ADVANCED FLUID
MANAGEMENT SOLUTIONS

RAASM S.p.a.

Via Marangoni 33, 36022

S. Zeno di Cassola (VI) Italy

Tel. +39 0424 570891

info@raasm.com

P/N 9456.100



Enclosed fixed hose reel in ABS with brackets in painted steel s. 430, for air, water and antifreeze, 20 bar, without hose, inlet-outlet G 1/2" (f). Central pin in AISI 304 stainless steel

AREAS OF USE


Aeronautics, Agriculture, Automotive, Building and road construction, Manufacturing industry, Mining industry, Lube trucks and transports, Shipping and offshore, Railway transport

FEATURES

Pressure	20 bar
Compatible fluids	air - water - antifreeze
Swivel joint	brass
Seals	Viton®
Characteristic	fixed
Material	painted steel with ABS drum
Couplings	-
Hose	-
ø and hose length	-
Inlet	G 1/2" (f)
Outlet	G 1/2" (f)
Reel flow path	brass - AISI 304 stainless steel



OVERALL DIMENSIONS (mm)

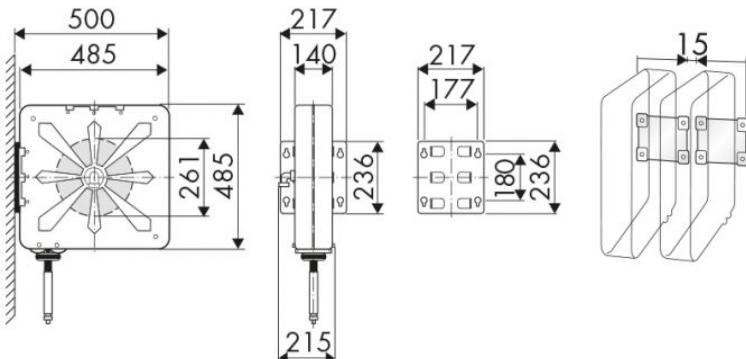

HOSE REELS CAPACITY

ø 5/16"	ø 3/8"	ø 1/2"
20 m	20 m	16 m