



ADVANCED FLUID  
MANAGEMENT SOLUTIONS

RAASM S.p.a.

Via Marangoni 33, 36022

S. Zeno di Cassola (VI) Italy

Tel. +39 0424 570891

info@raasm.com

**P/N 9456.300**



Enclosed fixed hose reel in ABS with brackets in painted steel s. 430, for water max 130 °C, 200 bar, without hose, inlet-outlet G 1/2" (f). Flow path in AISI 304 stainless steel

## AREAS OF USE


Aeronautics, Agriculture, Automotive, Building and road construction, Manufacturing industry, Mining industry, Lube trucks and transports, Shipping and offshore, Railway transport

## FEATURES

Pressure	200 bar
Compatible fluids	water max 130 °C and AdBlue®
Swivel joint	AISI 304 stainless steel
Seals	Viton®
Characteristic	fixed
Material	painted steel with ABS drum
Couplings	-
Hose	-
ø and hose length	-
Inlet	G 3/8" (f)
Outlet	G 1/2" (f)
Reel flow path	AISI 304 stainless steel



## OVERALL DIMENSIONS (mm)

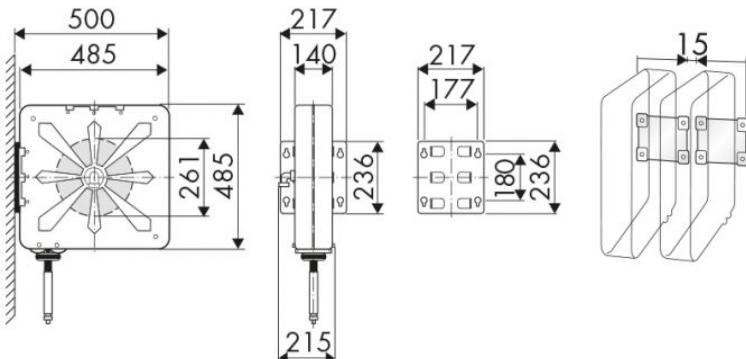

## HOSE REELS CAPACITY

ø 5/16"	ø 3/8"	ø 1/2"
20 m	20 m	16 m