



ADVANCED FLUID
MANAGEMENT SOLUTIONS

RAASM S.p.a.

Via Marangoni 33, 36022

S. Zeno di Cassola (VI) Italy

Tel. +39 0424 570891

info@raasm.com

P/N 9456.350



Enclosed fixed hose reel in ABS with brackets in painted steel s. 430, for water max 130 °C, 400 bar, without hose, inlet-outlet G 1/2" (f). Flow path in AISI 304 stainless steel

AREAS OF USE


Aeronautics, Agriculture, Automotive, Building and road construction, Manufacturing industry, Mining industry, Lube trucks and transports, Shipping and offshore, Railway transport

FEATURES

Pressure	400 bar
Compatible fluids	water max 130 °C and AdBlue®
Swivel joint	AISI 304 stainless steel
Seals	Viton® and Teflon®
Characteristic	fixed
Material	painted steel with ABS drum
Couplings	-
Hose	-
ø and hose length	-
Inlet	G 3/8" (f)
Outlet	G 1/2" (f)
Reel flow path	AISI 304 stainless steel



OVERALL DIMENSIONS (mm)

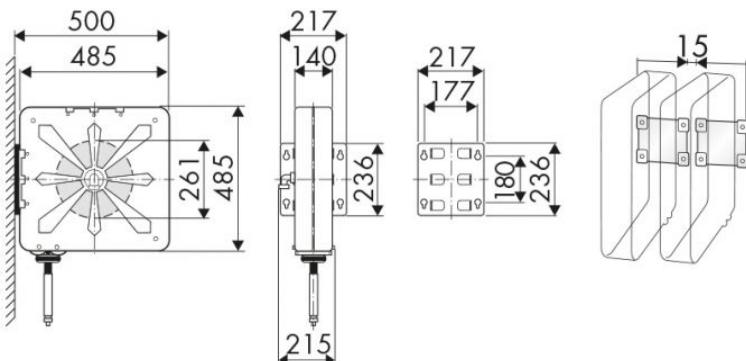

HOSE REELS CAPACITY

ø 5/16"	ø 3/8"	ø 1/2"
20 m	20 m	16 m