



ADVANCED FLUID  
MANAGEMENT SOLUTIONS

RAASM S.p.a.

Via Marangoni 33, 36022

S. Zeno di Cassola (VI) Italy

Tel. +39 0424 570891

info@raasm.com

**P/N 9530.300**



Fixed hose reel in ABS and brackets in painted steel s. 530, for hot water, 200 bar, without hose. Inlet G 3/8" (f) - outlet G 1/2" (f)

## AREAS OF USE


Aeronautics, Agriculture, Automotive, Building and road construction, Manufacturing industry, Lube trucks and transports

## FEATURES

Pressure	200 bar
Compatible fluids	water max 130 °C
Swivel joint	AISI 304 stainless steel
Seals	Viton®
Characteristic	fixed
Material	painted steel with ABS drum
Couplings	-
Hose	-
Ø and hose length	-
Inlet	G 3/8" (f)
Outlet	G 1/2" (f)
Reel flow path	AISI 304 stainless steel



## OVERALL DIMENSIONS (mm)

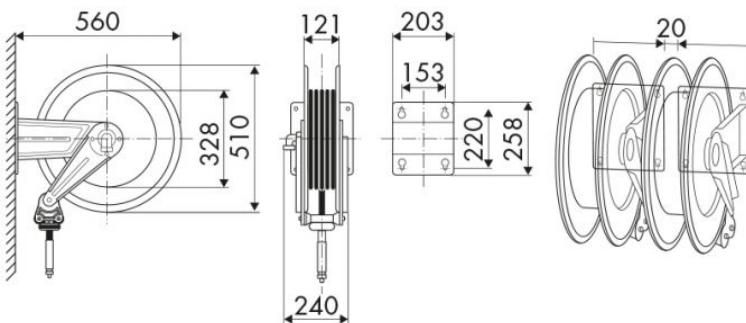

## HOSE REELS CAPACITY

Ø 3/8"	Ø 1/2"	Ø 5/8"
25 m	25 m	22 m