

Via Marangoni 33, 36022 S. Zeno di Cassola (VI) Italy Tel. +39 0424 570891 info@raasm.com

P/N 9536.250



Fixed hose reel in ABS and brackets in painted steel s. 530, for $AdBlue^{\circ}$, 10 bar, without hose. Inlet-outlet G 1" (f)

AREAS OF USE


Aeronautics, Agriculture, Automotive, Building and road construction, Manufacturing industry, Mining industry, Lube trucks and transports

FEATURES

Pressure	10 bar	
Compatible fluids	AdBlue [®]	
Swivel joint	AISI 316 stainless steel	
Seals	Viton [®]	
Characteristic	fixed	
Material	painted steel with ABS drum	
Couplings	-	
Hose	-	
ø and hose length	-	
Inlet	G 1" (f)	
Outlet	G 1" (h)	
Reel flow path	AISI 316 stainless steel	



OVERALL DIMENSIONS (mm)

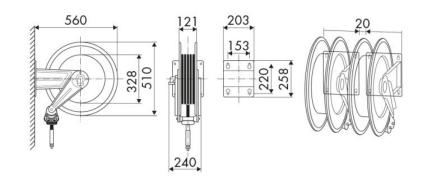

HOSE REELS CAPACITY

ø 5/8"	ø 3/4"	ø 1"
22 m	12 m	8 m