

Via Marangoni 33, 36022 S. Zeno di Cassola (VI) Italy Tel. +39 0424 570891 info@raasm.com

P/N 9540.200



Fixed hose reel in ABS and brackets in painted steel s. 540, for hot water, 100 bar, without hose. Inlet-outlet G 1" (f)

AREAS OF USE


Aeronautics, Agriculture, Automotive, Building and road construction, Manufacturing industry, Lube trucks and transports

FEATURES

Pressure	100 bar	
Compatible fluids	water max 130 °C	
Swivel joint	AISI 304 stainless steel	
Seals	Viton [®]	
Characteristic	fixed	
Material	painted steel with ABS drum	
Couplings	-	
Hose	-	
ø and hose length	-	
Inlet	G 1" (f)	
Outlet	G 1" (f)	
Reel flow path	AISI 304 stainless steel	



OVERALL DIMENSIONS (mm)

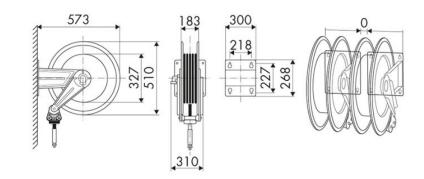

HOSE REELS CAPACITY

ø 5/8"	ø 3/4"	ø 1"
20 m	22 m	15 m