

Via Marangoni 33, 36022 S. Zeno di Cassola (VI) Italy Tel. +39 0424 570891 info@raasm.com

P/N 8542.500



Fixed hose reel in AISI 304 stainless steel s. 540, for grease, 600 bar, without hose. Inlet G 3/8" (f), outlet G 1/2" (f)

AREAS OF USE


Agriculture, Automotive, Cleaning, Building and road construction, Chemical industry, Manufacturing industry, Lube trucks and transports, Shipping and offshore, Railway transport

FEATURES

Pressure	600 bar	
Compatible fluids	grease	
Swivel joint	zinc plated steel	
Seals	polyurethane	
Characteristic	fixed	
Material	AISI 304 stainless steel	
Couplings	-	
Hose	-	
ø and hose length	-	
Inlet	G 3/8" (f)	
Outlet	G 1/2" (f)	
Reel flow path	zinc plated steel - AISI 304 stainless steel	



OVERALL DIMENSIONS (mm)

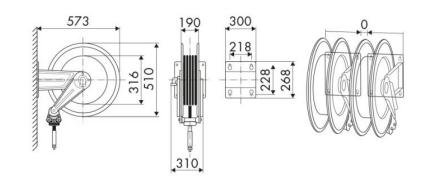

HOSE REELS CAPACITY

ø 5/16"	ø 3/8"	ø 1/2"	ø 5/8"
30 m	30 m	30 m	30 m