

Via Marangoni 33, 36022 S. Zeno di Cassola (VI) Italy Tel. +39 0424 570891 info@raasm.com

P/N 8554.205



Swivelling hose reel in AISI 304 stainless steel s. 540, for hot water, 100 bar, without hose. Inlet-outlet G 1/2" (f)

AREAS OF USE


Agriculture, Cleaning, Building and road construction, Chemical industry, Manufacturing industry, Mining industry, Shipping and offshore, Railway transport

FEATURES

Pressure	100 bar	
Compatible fluids	water max 130 °C	
Swivel joint	AISI 304 stainless steel	
Seals	Viton [®]	
Characteristic	swivelling	
Material	AISI 304 stainless steel	
Couplings	-	
Hose	-	
ø and hose length	-	
Inlet	G 1/2" (f)	
Outlet	G 1/2" (f)	
Reel flow path	AISI 304 stainless steel	



OVERALL DIMENSIONS (mm)

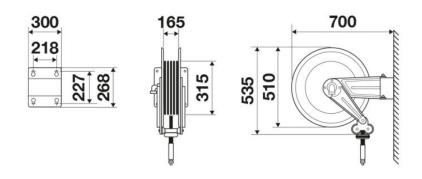

HOSE REELS CAPACITY

ø 5/8"	ø 3/4"	ø 1"
20 m	22 m	15 m