

Via Marangoni 33, 36022 S. Zeno di Cassola (VI) Italy Tel. +39 0424 570891 info@raasm.com

P/N 8564.300



Fixed hose reel in AISI 304 stainless steel s. 560, for hot water, 200 bar, without hose. Inlet G 3/8 (f), outlet G 1/2 (f)

AREAS OF USE


Agriculture, Cleaning, Building and road construction, Chemical industry, Manufacturing industry, Mining industry, Shipping and offshore, Railway transport

FEATURES

Pressure	200 bar
Compatible fluids	water max 130 °C
Swivel joint	AISI 304 stainless steel
Seals	Viton [®]
Characteristic	fixed
Material	AISI 304 stainless steel
Couplings	-
Hose	-
ø and hose length	-
Inlet	G 3/8" (f)
Outlet	G 1/2" (f)
Reel flow path	AISI 304 stainless steel



OVERALL DIMENSIONS (mm)

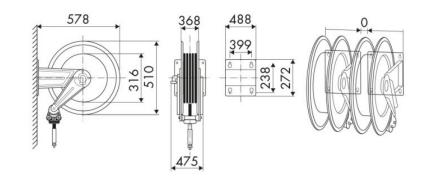

HOSE REELS CAPACITY

ø 3/8"	ø 1/2"	ø 5/8"
60 m	60 m	60 m