

Via Marangoni 33, 36022 S. Zeno di Cassola (VI) Italy Tel. +39 0424 570891 info@raasm.com

# P/N 256535.200

Manual trolley-mounted hose reel in AISI 316 stainless steel s. 530, for hot water, 100 bar, without hose. Inlet-outlet G 1/2" (f). Hose guide, safety system and rotation lock as standard

## **AREAS OF USE**


Agriculture, Cleaning, Chemical industry, Manufacturing industry, Mining industry, Shipping and offshore, Railway transport

#### **FEATURES**

Pressure	100 bar		
Compatible fluids	water max 130 °C		
Swivel joint	AISI 316 stainless steel		
Seals	Viton <sup>®</sup>		
Characteristic	trolley-mounted		
Material	AISI 316 stainless steel		
Couplings	-		
Hose	-		
ø and hose length	-		
Inlet	G 1/2" (f)		
Outlet	G 1/2" (f)		
Reel flow path	AISI 316 stainless steel		



# **OVERALL DIMENSIONS (mm)**

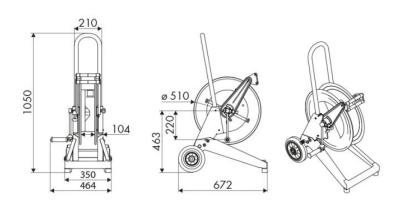

## **HOSE REELS CAPACITY**

ø 1/4"	ø 5/16"	ø 3/8"	ø 1/2"	ø 5/8"	ø 3/4"	ø 1"
90 m	65 m	35 m	25 m	20 m	15 m	7 m