

Via Marangoni 33, 36022 S. Zeno di Cassola (VI) Italy Tel. +39 0424 570891 info@raasm.com

P/N 256545.205

Manual trolley-mounted hose reel in AISI 316 stainless steel s. 540, for hot water, 100 bar, without hose. Inlet-outlet G 1/2" (f). Hose guide, safety system and rotation lock as standard

AREAS OF USE


Agriculture, Cleaning, Chemical industry, Manufacturing industry, Mining industry, Shipping and offshore, Railway transport

FEATURES

Pressure	100 bar		
Compatible fluids	water max 130 °C		
Swivel joint	AISI 316 stainless steel		
Seals	Viton [®]		
Characteristic	trolley-mounted		
Material	AISI 316 stainless steel		
Couplings	-		
Hose	-		
ø and hose length	-		
Inlet	G 1/2" (f)		
Outlet	G 1/2" (f)		
Reel flow path	AISI 316 stainless steel		



OVERALL DIMENSIONS (mm)

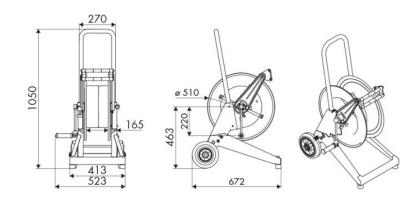

HOSE REELS CAPACITY

ø 1/4"	ø 5/16"	ø 3/8"	ø 1/2"	ø 5/8"	ø 3/4"	ø 1"
150 m	110 m	65 m	45 m	35 m	25 m	15 m