ADVANCED FLUID MANAGEMENT SOLUTIONS

RAASM S.p.a. Via Marangoni 33, 36022 S. Zeno di Cassola (VI) Italy Tel. +39 0424 570891 info@raasm.com

P/N 256565.300

Manual trolley-mounted hose reel in AISI 316 stainless steel s. 560, for hot water, 200 bar, without hose. Inlet G 3/8" (f), outlet G 1/2" (f). Hose guide, safety system and rotation lock as standard

AREAS OF USE


Agriculture, Cleaning, Chemical industry, Manufacturing industry, Mining industry, Shipping and offshore, Railway transport

FEATURES

Pressure	200 bar	
Compatible fluids	water max 130 °C	
Swivel joint	AISI 316 stainless steel	
Seals	Viton®	
Characteristic	trolley-mounted	
Material	AISI 316 stainless steel	
Couplings	-	
Hose	-	
ø and hose length	-	
Inlet	G 3/8" (f)	
Outlet	G 1/2" (f)	
Reel flow path	AISI 316 stainless steel	



OVERALL DIMENSIONS (mm)

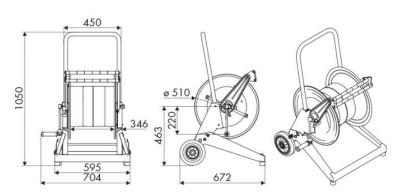

HOSE REELS CAPACITY

ø 1/4"	ø 5/16"	ø 3/8"	ø 1/2"
320 m	240 m	140 m	100 m