



ADVANCED FLUID
MANAGEMENT SOLUTIONS

RAASM S.p.a.

Via Marangoni 33, 36022
S. Zeno di Cassola (VI) Italy
Tel. +39 0424 570891
info@raasm.com

P/N 62174

Pneumatic piston pump s. 238, R 50:1 - 1500 g/min,
with suction tube 740 mm

AREAS OF USE


Aeronautics, Agriculture, Automotive, Building and road
construction, Manufacturing industry, Mining industry,
Lube trucks and transports, Railway transport

FEATURES

Flow rate	1500 g/min
Ratio	50:1
Compatible fluids	greases, medium/high viscosity
Suction tube upper body	aluminum
Suction tube	carbon steel
Air inlet connection	G 1/4" (f)
Fluid outlet connection	G 3/8" (f)
Air working pressure	6 ÷ 8 bar
Average air consumption	330 l/min
Noise level	81 dB
Air max pressure	8 bar
Suitable for drums	50 ÷ 60 kg
Pump	-
Hose reels	-
Gun	-
Drum cover	-
Follower plate	-
Grease connection hose	-
Nipple	-



OVERALL DIMENSIONS (mm)

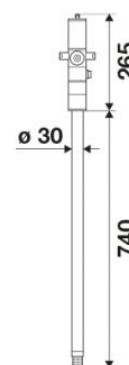

Drip-tray	-
Packing	No. 1 - 0,015 m3
Weight	6 kg