




ART. 3085815

Centralized lubrication system - progressive 30

Motor operated pump s. C30F for grease with 200 kg reservoir (internal \varnothing 540 ÷ 580 mm), R 50:1 and delivery pressure control assembly

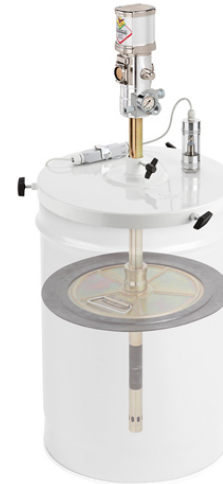

FLUIDS

GREASE

SECTORS

AERONAUTIC | AGRICULTURE | LUBE TRUCK AND INDUSTRIAL VEHICLE | BUILDING INDUSTRY AND ROAD CONSTRUCTION | RAILWAY TRANSPORT | CHEMICAL INDUSTRY | MANUFACTURING INDUSTRY | MINING | CENTRALIZED LUBRICATION SYSTEM | SHIPPING AND OFFSHORE

Features	UM	Value
Flow rate	cm ³ /min	1330
Tank capacity	kg	200
Pressure ratio		50:1
Air inlet connection		G 1/4" (f)
Lubricant outlet connection		G 3/8" (f)
Working temperature	°C	-25 ÷ +60
Lubricant		grease max NLGI 2
Drum internal \varnothing	mm	540 ÷ 580
Pump(R 50:1)	P/N	62195
Drum cover	P/N	10/531
Membrane	P/N	66590
Packing	N° - m ³	2 - 0,100
Net weight	kg	16,3
Gross weight	kg	17,1

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.