



# ART. 8532.150

## Stainless steel hose reels - s. 430-530

Fixed hose reel, stainless steel AISI 304, s.530, for air-water, 20 bar, without hose. Inlet-outlet G 1" (f)



### FLUIDS

FRESH OIL | ANTIFREEZE | AIR | WATER | DIESEL FUEL | NITROGEN/INFLATING USE | A1 JET (FUEL FOR PLANES)

### SECTORS

AGRICULTURE | CLEANING | BUILDING INDUSTRY AND ROAD CONSTRUCTION | RAILWAY TRANSPORT | CHEMICAL INDUSTRY | MANUFACTURING INDUSTRY | MINING | SHIPPING AND OFFSHORE

### CERTIFICATIONS

ATEX (ZONE 1) | ATEX (ZONE 21)

Features	UM	Value
Pressure	bar	20
Compatible fluids		air - water - diesel fuel
Swivel joint		brass
Seals		Viton®
Characteristic		fixed
Material		AISI 304 stainless steel
Couplings		-
Hose		-
Ø and hose length	Ø - m	-
Inlet		G 1" (f)
Outlet		G 1" (f)
Reel flow path		brass - AISI 304 stainless steel
Internal drum width	mm	104

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA  
Tel. 0039 0424 571111 - Fax. 0039 0424 571135


info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.



Overall dimensions

---

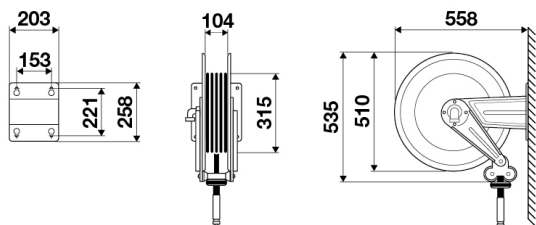

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA  
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.