



# ART. 8532.500

## Stainless steel hose reels - s. 430-530

Fixed hose reel, stainless steel AISI 304, s.530, for grease, 600 bar, without hose. Inlet G 3/8 (f) - outlet G 1/2 (f)



### FLUIDS

GREASE

### SECTORS

AGRICULTURE | AUTOMOTIVE | LUBE TRUCK AND INDUSTRIAL VEHICLE | CLEANING | BUILDING INDUSTRY AND ROAD CONSTRUCTION | RAILWAY TRANSPORT | CHEMICAL INDUSTRY | MANUFACTURING INDUSTRY | SHIPPING AND OFFSHORE

### CERTIFICATIONS

ATEX (ZONE 1) | ATEX (ZONE 21)

Features	UM	Value
Pressure	bar	600
Compatible fluids		grease
Swivel joint		zinc plated steel
Seals		polyurethane
Characteristic		fixed
Material		AISI 304 stainless steel
Couplings		-
Hose		-
Ø and hose length	Ø - m	-
Inlet		G 3/8" (f)
Outlet		G 1/2" (f)
Reel flow path		zinc plated steel - AISI 304 stainless steel
Internal drum width	mm	104

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA  
Tel. 0039 0424 571111 - Fax. 0039 0424 571135


info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.



## Overall dimensions

---

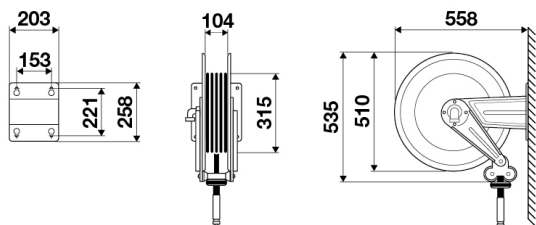

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA  
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.