

# CABLE REELS AND HOSE REELS



**ADVANCED FLUID  
MANAGEMENT SOLUTIONS**

Manage your energy orderly  
PRESENTATION OF PRODUCTS





# Cable reels with lamp or socket

## ✓ TECHNICAL ADVANTAGES

- Special electrical collector to reduce overheating drastically.
- Possibility of personalising the rewinding force.
- Thermal protector standard on all models.

## ✓ COMMERCIAL ADVANTAGES

- Cable rewind at safe speed with the rewinding clutch "SPEED CONTROL" accessory.
- Cable guides with 4 rollers for cable always intact.
- IP44 standard certification, for use also in the most difficult environments.
- Adjustable bracket with three standard positioning possibilities.

## SECTORS OF USE



Automotive



Agriculture



Chemicals



Industry



Colour:



STANDARD



RAL 1004

## ACCESSORIES

Rewinding clutch  
"SPEED CONTROL"



Protection cap



Bayonet bracket



## USE OF STANDARD ADJUSTABLE BRACKET

ADJUSTABLE POSITION

1



FIXED POSITION

2




90° FIXED POSITION



3




### Cable reels series 280 without socket - 230 V single-phase

	P/N	DESCRIPTION
	2315	Number of conductors 3 - Cable type 3G x 1,5 mm - H05 VV-F - Cable length 14 + 1 m - Cable inlet 1,2 m
	3315	Number of conductors 3 - Cable type 3G x 1,5 mm - H07 RN-F - Cable length 9 + 1 m - Cable inlet 1,2 m
	2325	Number of conductors 3 - Cable type 3G x 2,5 mm - H05 VV-F - Cable length 9 + 1 m - Cable inlet 1,2 m
	3325	Number of conductors 3 - Cable type 3G x 2,5 mm - H07 RN-F - Cable length 7 + 1 m - Cable inlet 1,2 m


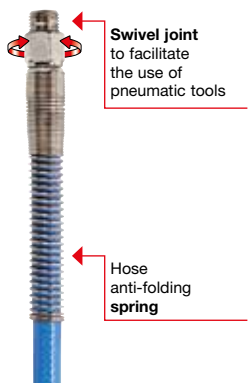
### Cable reels series 280 230 V single-phase - with socket and plug Schuko IP44

	P/N	DESCRIPTION
	2315S	Number of conductors 3 - Cable type 3G x 1,5 mm - H05 VV-F - Cable length 14 + 1 m - Cable inlet 1,2 m
2315T	Number of conductors 3 - Cable type 3G x 1,5 mm - H05 VV-F - Cable length 14 + 1 m - Cable inlet 1,2 m	

### Cable reels s. 280 and 290 with and without transformer with fluorescent or led portable lamp

	P/N	DESCRIPTION
	2210F23	Number of conductors 2 - Cable type 2 x 1 mm - H05 RN-F - Cable length 14 + 1 m - Cable inlet 1,2 m - Inlet voltage 230 V AC - 50 Hz - With fluorescent portable lamp 11 W - Lamp power supply voltage 230 V AC - 50 Hz
	2210F24	Number of conductors 2 - Cable type 2 x 1 mm - H05 RN-F - Cable length 14 + 1 m - Cable inlet 1,2 m - Inlet voltage 24 V DC - With fluorescent portable lamp 11 W - Lamp power supply voltage 24 V DC
2210TL	Number of conductors 2 - Cable type 2 x 1 mm - H05 RN-F - Cable length 14 + 1 m - Cable inlet 1,2 m - Inlet voltage 230 V AC - 50 Hz - With led portable lamp s. L1224 Lamp power supply voltage from 12 ÷ 24 V AC/DC	

### Enclosed hose reels series 280 air-water - 20 bar - 40 °C

	P/N	DESCRIPTION	
	92808.101	Blue polyurethane hose - 10 m - ø 8 x 12 mm inlet G 3/8" (m) - outlet G 1/4" (m)	 <p>Swivel joint to facilitate the use of pneumatic tools</p> <p>Hose anti-folding spring</p>
	92808.102	Blue polyurethane hose - 14 m - ø 8 x 12 mm inlet G 3/8" (m) - outlet G 1/4" (m)	
92808.105	Blue polyurethane hose - 8 + 1 m - ø 10 x 14,5 mm inlet G 3/8" (m) - outlet G 3/8" (m)		

# ADVANCED FLUID MANAGEMENT SOLUTIONS

technology, quality, efficiency

The stage of researching and developing cutting-edge solutions carried out completely in Italy is the starting point for the entire production cycle.

To offer high-quality products is one of our main objectives. Specific and rigorous tests accompany every single stage of the production process.

RAASM offers a complete range of fluid management solutions suitable for many different sectors of use. Our success is founded on the ability to identify and satisfy the specific needs of our customers.



## CATALOGUE AVAILABLE:

View the catalogue



No. 223-AE

**RAASM S.p.A.**  
36022 S. ZENO DI CASSOLA (VI)  
Via Marangoni, 33 - ITALIA

**Export department**  
Tel. +39 0424 571 130 - Fax +39 0424 571 135

**Technical department**  
Tel. +39 0424 571 150 - Fax +39 0424 571 155

info@raasm.com

[www.raasm.com](http://www.raasm.com)

